




45 Minute Fire Rated Flush Door Mineral Core - 745M (3/4 Hour)

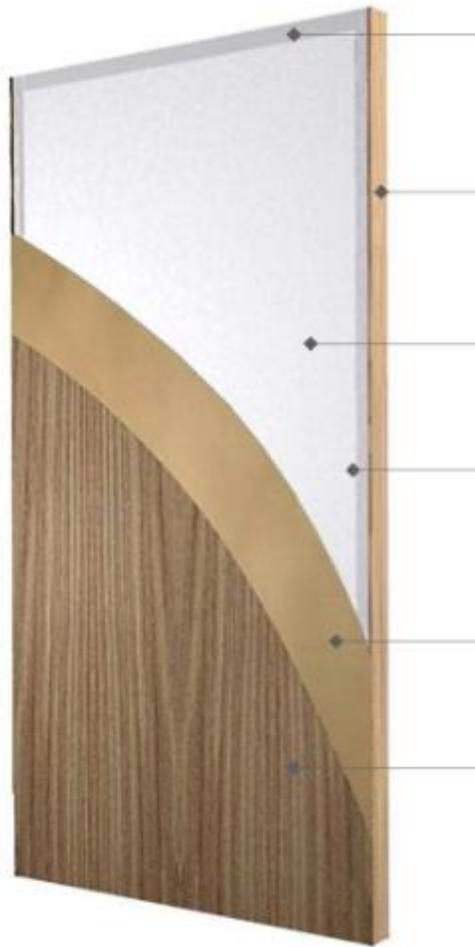

Top/Bottom Rail and Stiles: 1.5" thick minimum
LEX REM HD Composite Material

Vertical Stiles: 1/2" thick matching wood stile before
trim; 1/4" Max wood stile after trim.

Core: LEX Mineral Core

Core/Edge Interface: Stiles and Rails are bonded to
core and core assembly is sanded prior to application
of crossband and veneer.

Crossband backer for wood veneered doors

Faces: Options include Standard or Custom Wood
Veneer minimum 1/50"; Medium Density Overlay or
Hardboard; High Pressure Laminate;

Maximum door size: 4/0" x 9/0" (Singles) 7/0 x 9/0" (Pairs)

Thickness options: 1-3/4" Standard (2-1/4" Optional)

Fire Ratings: 45 Minutes – Meets UL 10B/ 10C & NFPA 252 standards (some restrictions apply)

STC Sound Rating: Up to STC 37

Warranty: Limited Lifetime (see warranty sheet for details)

LEED Options: Recycled Content | No Added Formaldehyde | CARB Phase II

Manufacturing Location: San Antonio, TX USA

Veneer Options: Wood veneers (standard & custom) | MDO or Hardboard | High Pressure
Decorative Laminate (HPDL)

Finishing Options: Unfinished | Primed | Clear Coat | Custom Color Finish (Conversion Varnish)

Specialty Options: Raised Moldings | Matching Fire Rated Wood Frames